ROOF MAY BE METAL OR 1/2" EXT. PLYWOOD OR OTHER SHEATHING WITH SHINGLES OR ROLL ROOFING. INSULATE ROOF WITH INSULATION BOARD OR 2" OF FIBER GLASS.

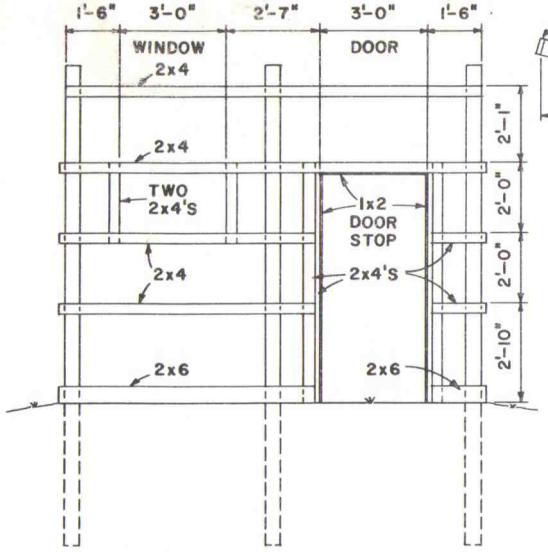

FRONT FRAMING

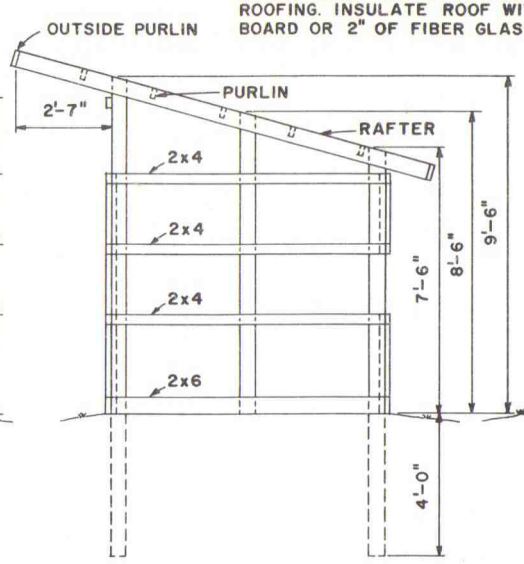

SIDE FRAMING

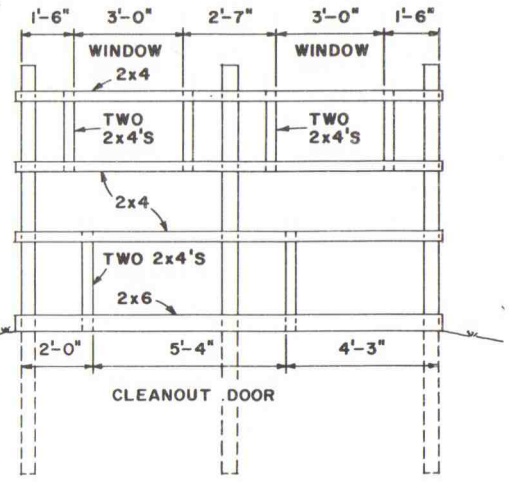

REAR FRAMING

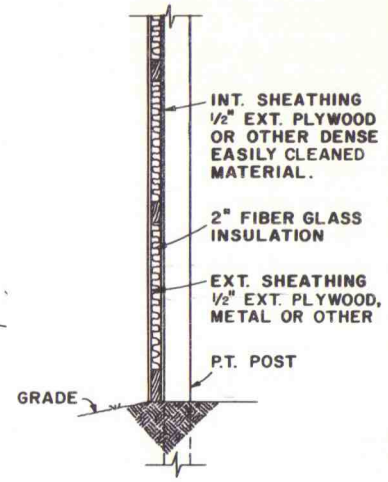

TYPICAL WALL SECTION

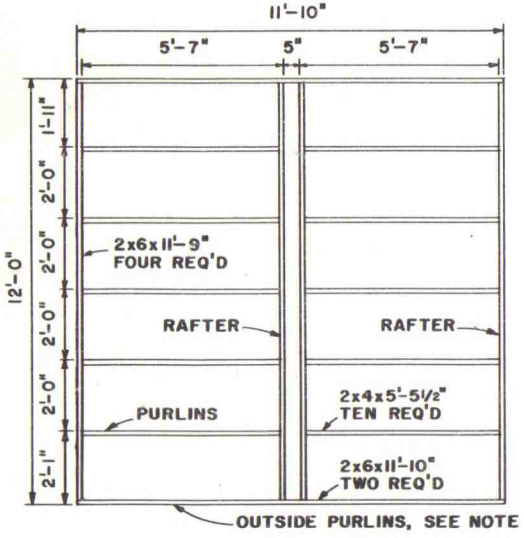

ROOF FRAMING

NOTE:
BUILD ROOF FRAME IN TWO PANELS NAIL EACH PANEL TO P.T. POSTS, THEN ATTACH THE TWO OUTSIDE PURLINS.

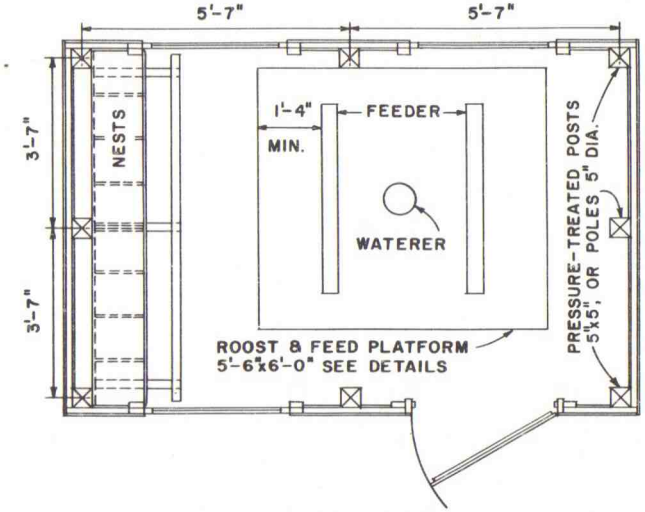

FLOOR PLAN

12" 6" 0 1' 2'

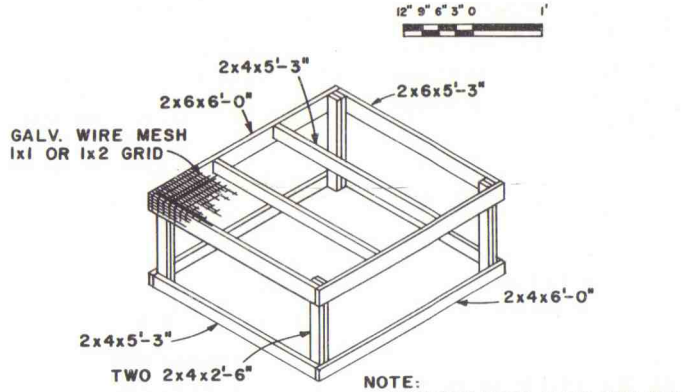

NOTE:
ENCLOSE BOTH ENDS AND ONE SIDE WITH 1/2" EXT. PLYWOOD. OPEN SIDE TO FACE OUTSIDE CLEANOUT DOOR.

ROOST & FEED PLATFORM DETAILS

12" 6" 0 1' 2' 3'

NOTES:
TOTAL OUTSIDE DIMENSIONS AFTER COMPLETION APPROXIMATELY 8'x12'.
FLOOR MAY BE DIRT OR CONCRETE.
DRESS LUMBER THRU-OUT.
CONSULT LOCAL HEALTH AND BUILDING CODE AUTHORITIES BEFORE STARTING CONSTRUCTION.

BASED ON: W. VA. UNIV. PLAN NO. PO-145

COOPERATIVE EXTENSION WORK IN AGRICULTURE AND HOME ECONOMICS
STATE OF TENNESSEE
UNIVERSITY OF TENNESSEE
AGRICULTURAL ENGINEERING DEPARTMENT AND
UNITED STATES DEPARTMENT OF AGRICULTURE COOPERATING

POULTRY HOUSE
25 TO 40 LAYERS

W. VA. '74	6187	SHEET 1 OF 1